

TECHNICAL SPECIFICATION & GTP,


HV BUSHING RING CLAMP OF DISTRIBUTION TRANSFORMER

Description of Material		
HV Bushing Ring clamp with 04Nos. Holes		
<u>Technical Particulars</u>		
Sl no	Particulars	Description
1	Material	MS with GI Coating
2	Sheet Thickness	1mm (No Tolerance allowed)
3	Inner ring Diameter	115mm
4	Hole to Hole Inner Diameter	120mm
5	Hole to Hole Outer Diameter	156mm
6	outer ring Diameter	130mm
7.	Ring Height	16mm

Note:-

1. If facility of any acceptance test of above material is not available at firm's premises, then inspecting authority will send a sealed sample of the above material to NABL lab for such test and mentioned lot will be accepted only when it successfully pass in acceptance test. The cost of such test (s) shall be borne by the supplier firm.

Drawing of HV Bushing Ring Clamp

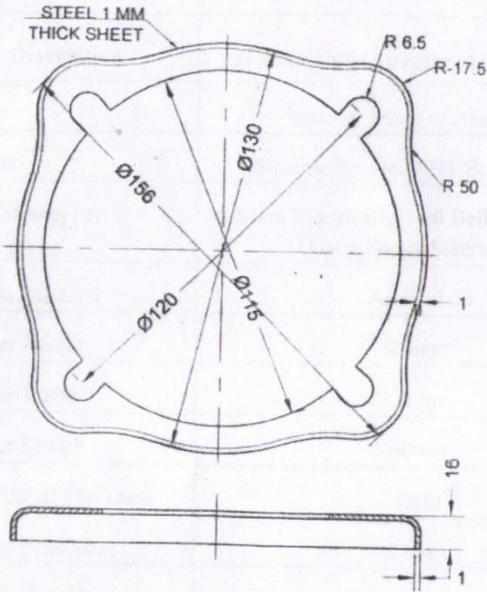

NOTE -

1. ALL DIMENSION ARE IN MM UNLESS OTHERWISE STATED.
2. DIMENSIONS INDICATED ARE SUBJECT TO STANDARD TOLERANCE

DGN:-BMS		TITLE:-				
DRN:- RAHUL K		CLAMPING RING				
CHD:-BMS		SCALE	DATE	SHEET	ITEM CODE	DWF 1/00 REF 1 SAT - DPT
APPD		1 1		1 1		
TOLERANCE:- ±2		ALL DIMENSIONS ARE IN MM UNLESS SPECIFIED				
DGN NO:-						